


STANDARD FEATURES:

- AASHTO H20 RATED TO 6 FT DEPTH (TO BOTTOM OF TANK)
- 750 & 1250 GALLON SIZES (APPROX)
- 4500 PSI CONCRETE
- GRADE 60 REINFORCING
- 8" TRAFFIC BEARING LID
- 4" WALLS AND FLOOR

NOTES:

- ALLOW FOR MANHOLE RING AND COVER IN TOTAL HEIGHT
- STANDARD INLET AND OUTLET FITTINGS ARE 4" RUBBER BOOTS
- CONFORMS TO CITY OF AUSTIN OIL WATER SEPARTOR DESIGN BY R.J. BRANDES, 1998

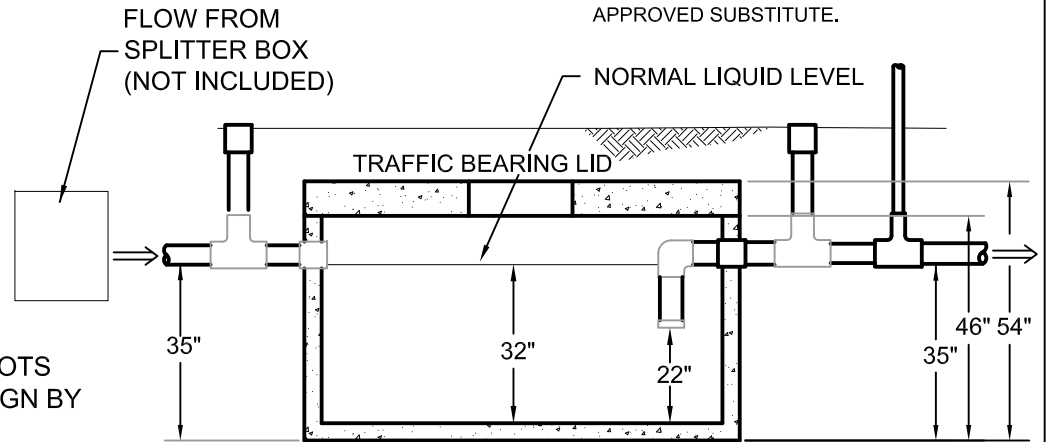

SECTION C-C

SIZE:	750	1000	1250
DIMENSION A	99"	127"	134"
DIMENSION B	65"	66"	75"

LOW PROFILE OIL WATER SEPARATOR - CITY OF AUSTIN

PO Box 357
 Kyle, Texas 78640
 512.268.9711
 Austin Line 512.476.5838
 Fax 512.268.0215
 hillcountryconcrete.com

LOW PROFILE OIL WATER SEPARATOR - CITY OF AUSTIN